


SM-A405F REV03

- sheet01 : GSM / WCDMA / LTE RF
- sheet02 : TRANCEIVER, DRX
- sheet03 : SENSORS, DMB, CONNECTIVITY
- sheet04 : LASSEN O+
- sheet05 : PMIC(Main,IF), KEY, MOTOR, eMMC, IF CON
- sheet06 : AUDIO, SD/SIM, SHIELD CAN
- sheet07 : CAMERA, DISPLAY


Product	SM-A405F
Version	REV03
Project Name	SM-A405F
Project Manager	SM-A405F
Project Engineer	SM-A405F
Project Designer	SM-A405F
Project Checker	SM-A405F
Project Approver	SM-A405F

SAMSUNG CONFIDENTIAL
THIS DOCUMENT CONTAINS CONFIDENTIAL
INFORMATION. INFORMATION THAT IS
SAMSUNG ELECTRONICS CO.'S PROPERTY,
OR MAY BECOME SUCH, IS TO BE KEPT AS SUCH.
REPEAT NO. APPROVED BY SAMSUNG


DRX

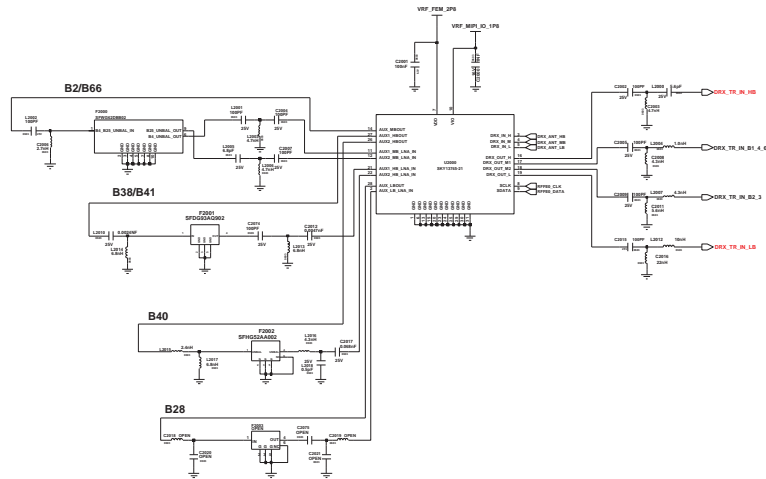


APT MODULATOR




TRANCEIVER

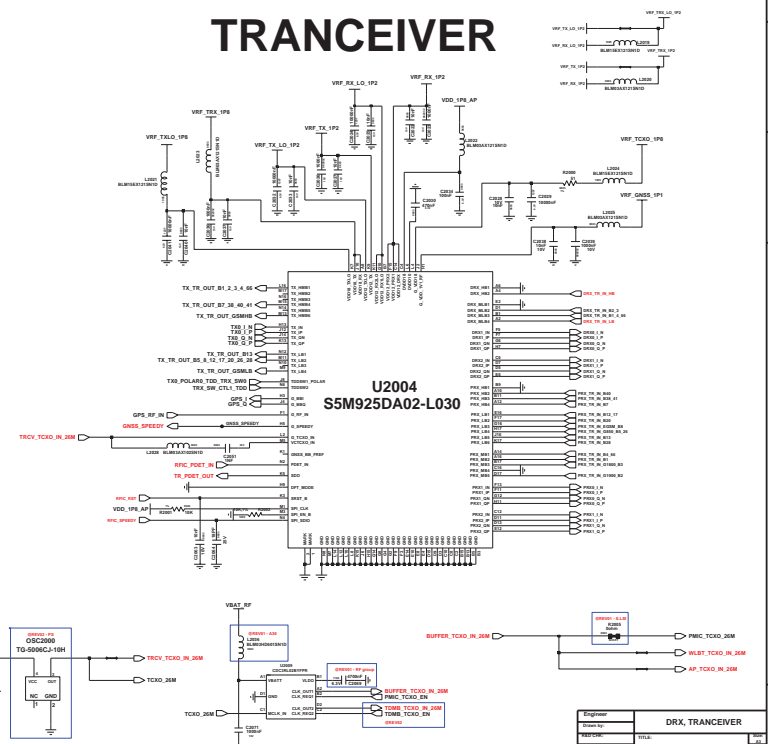

Engineer	DRX, TRANCEIVER
Drawn by	SM-J737P/VIR4
Checked	
Approved	
Design Department	

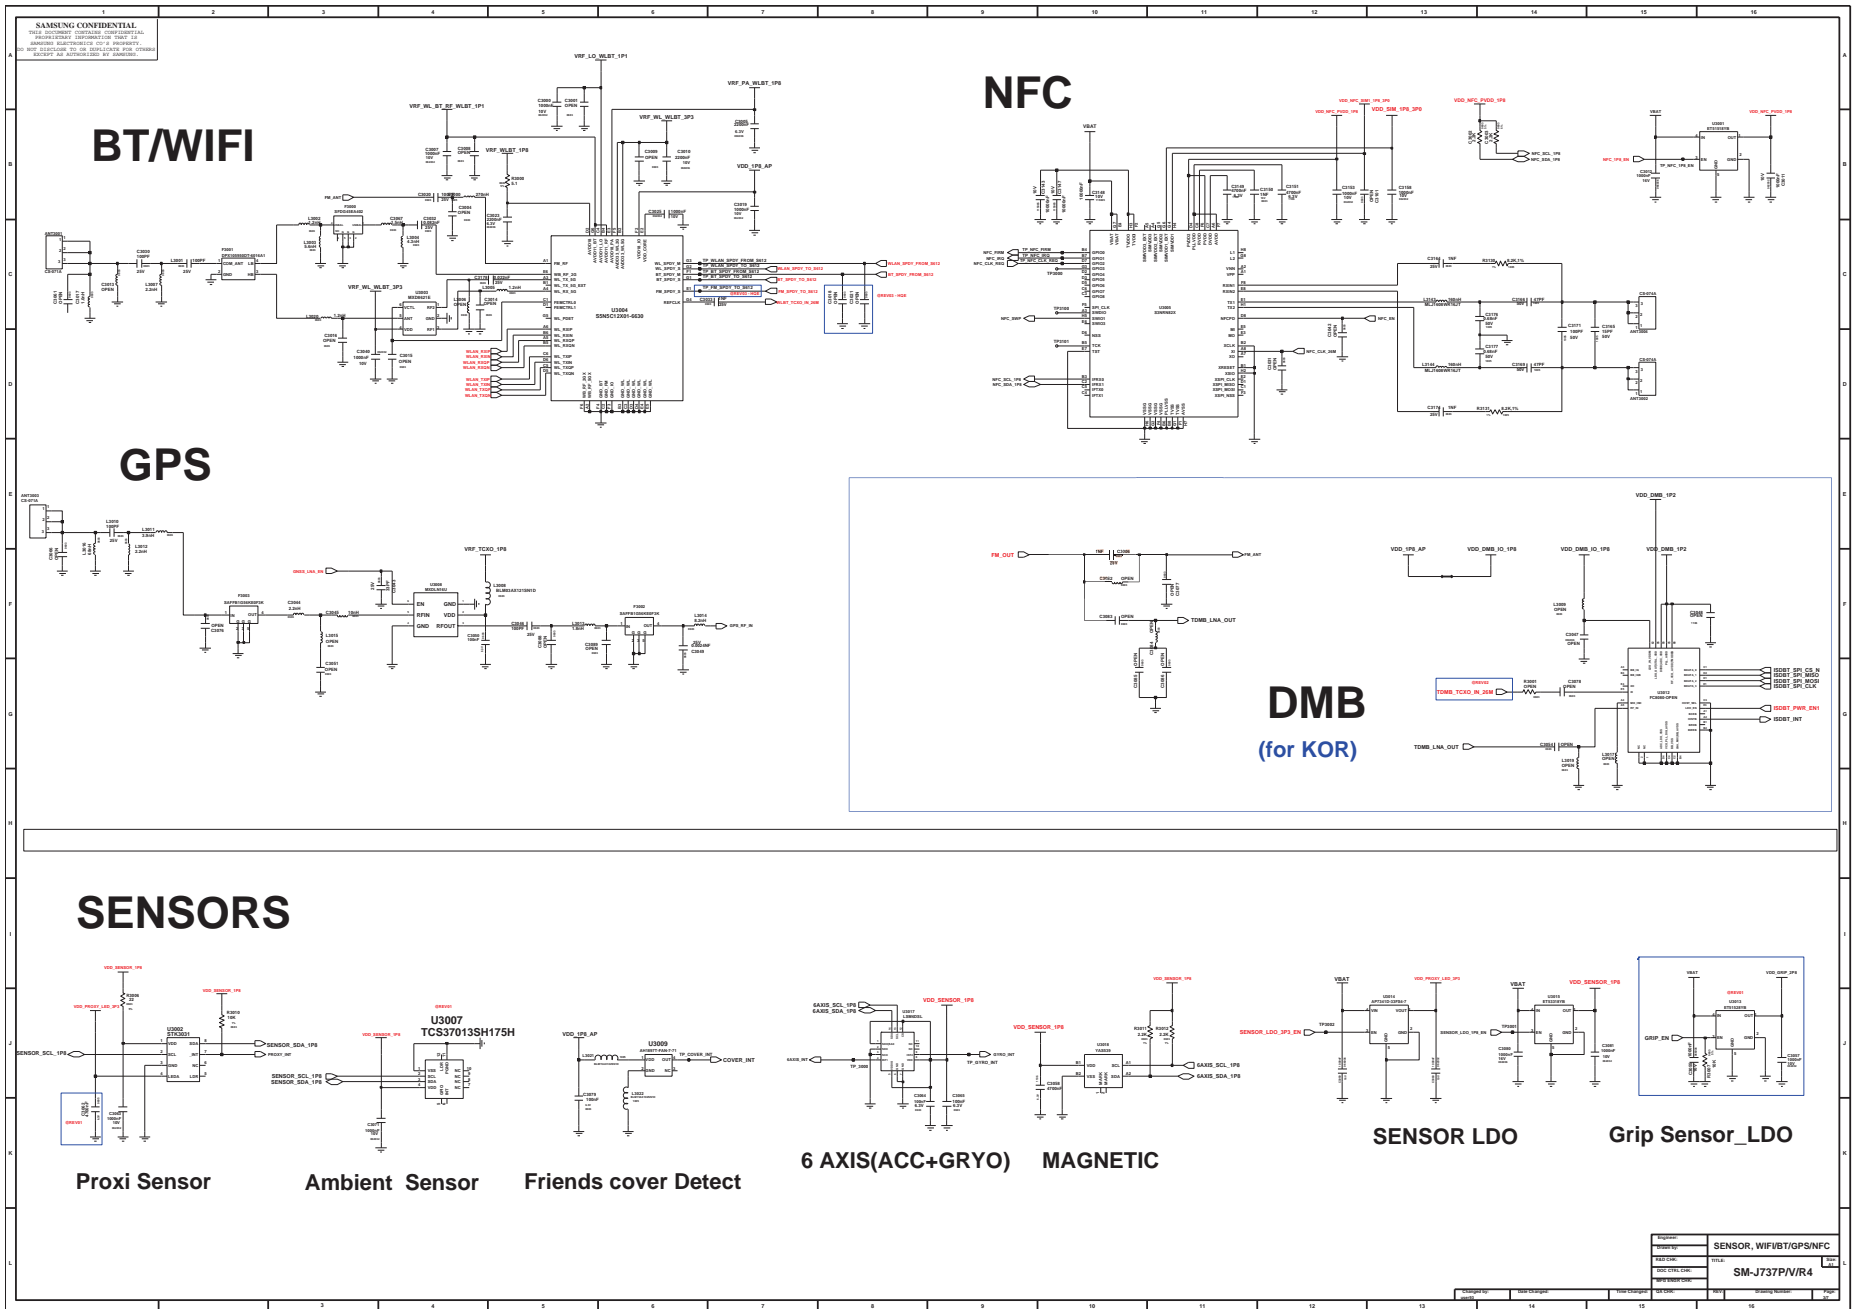



AP JTAG(BOM NC)












BOOT option (need to update for Lasser


1st	2nd
uMNC	uSB
uSB	-
RD CARD	uSB
uMNC	RD CARD





AP THM

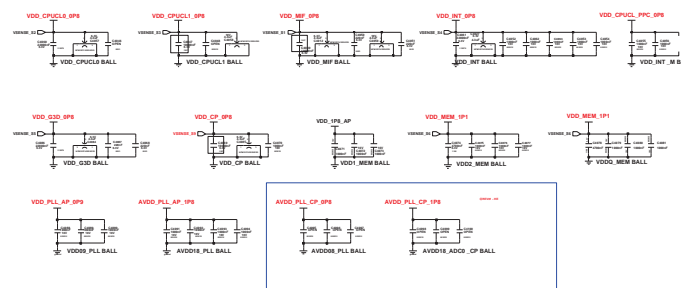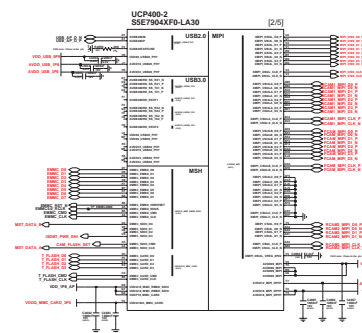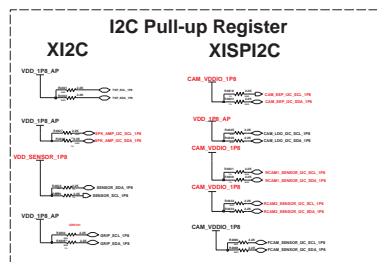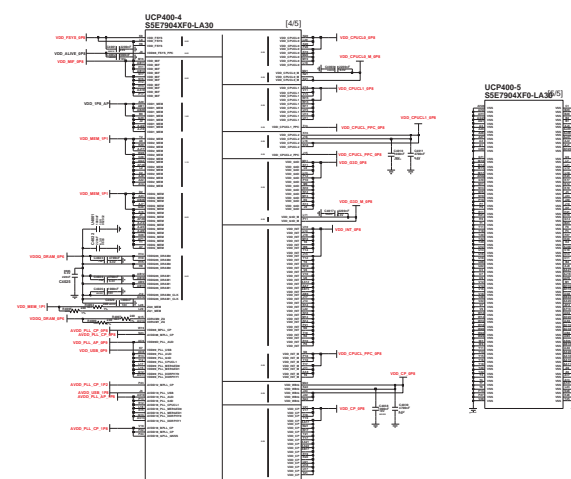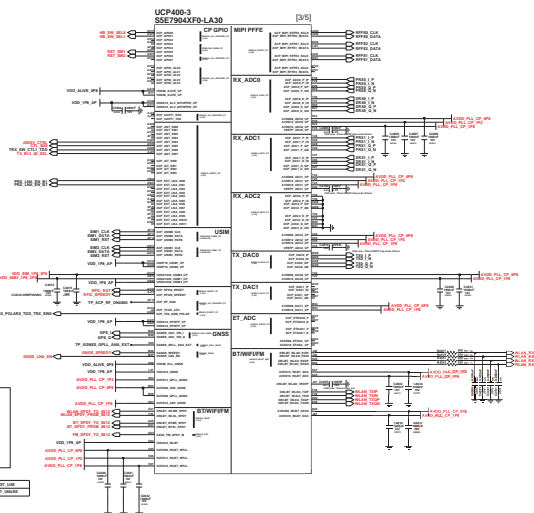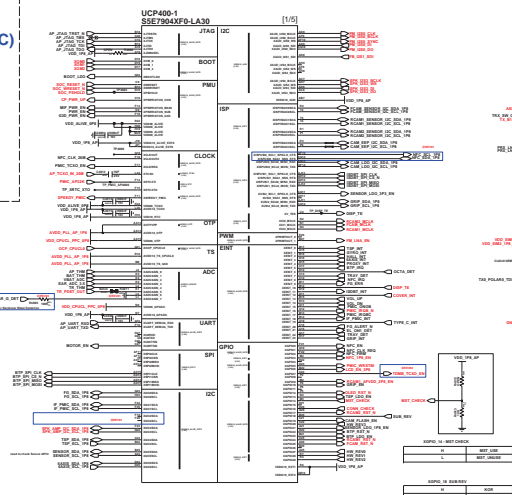


MAIN_PMIC

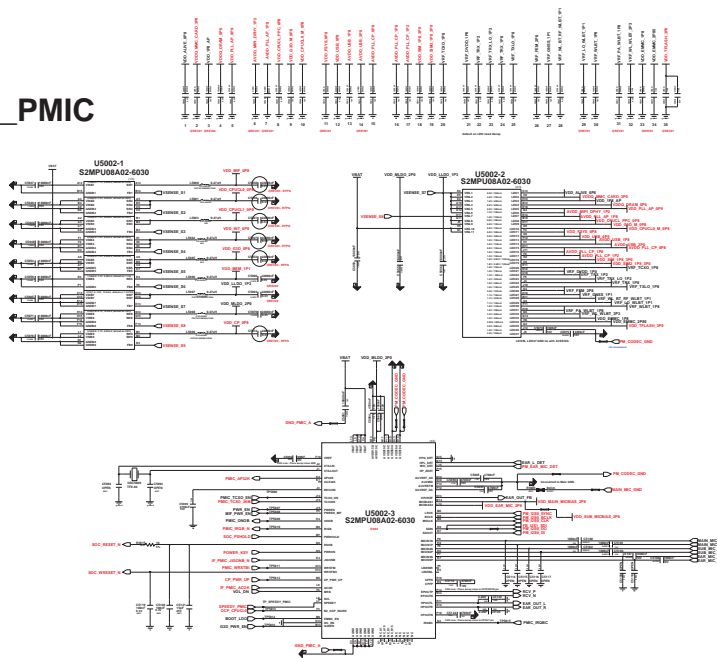


IF_PMIC

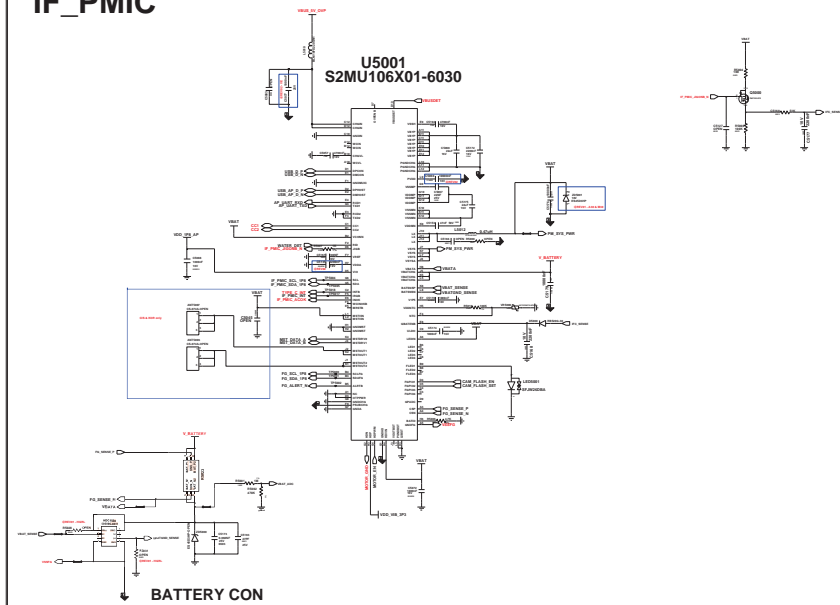


VOLUME KEY



POWER KEY





FPS PWR




Finger Print Sensor

64GB eMMC 5.1

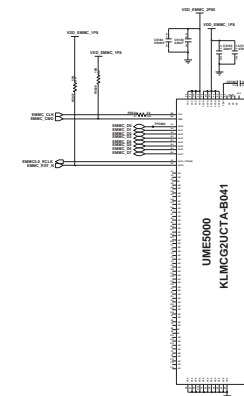


RCV CONTACT


Sub MIC

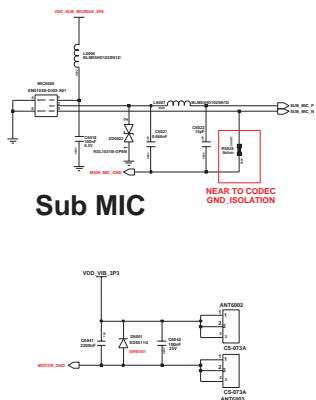


Ear MIC

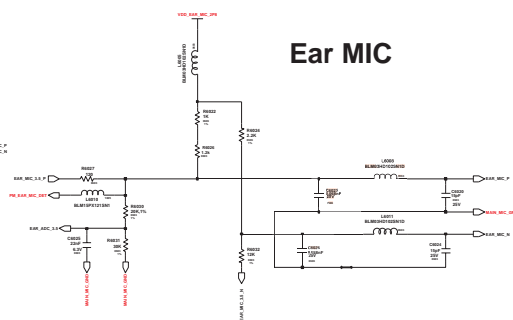

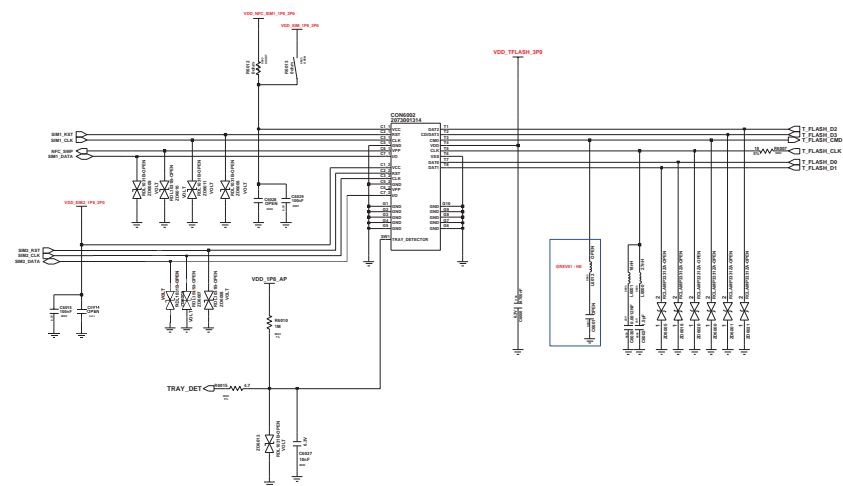


SHIELD CAN



2D BARCODE



	FN (2004)	FM (2005)	S (2007)		
FN  10000	R6004 Solder				
FM  10000	R6005	Solder			
S  10000	R6006		Solder		

BOTH HOLE

